

FLYTECH

POS615N2

POS617N2

Ultra-Slim Swivel POS Solution


Windows Linux Android 13



KEY FEATURES:

- Integrated with Intel® Alder Lake-N and Meteor Lake processors
- Support Windows, Linux, and Android operating systems
- Two options of 15.1" and 15.6" main displays for selection
- Swivel stand design with 180° left and right rotation
- Effortlessly access the motherboard box for easy service and expansion
- Versatile selection of peripherals for better functionality

DIMENSIONS

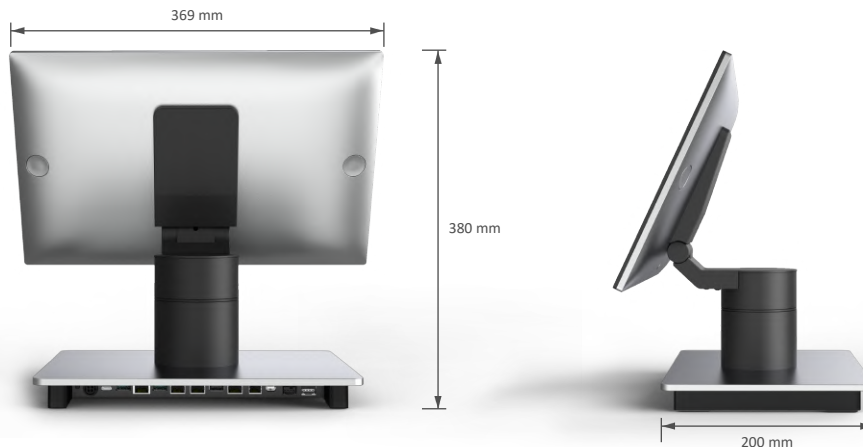

SPECIFICATIONS





	Motherboard	G35	G75U
System	Processor	Intel® Alder Lake N: N97, i3-N305	Intel® Meteor Lake Core Ultra 5 125U
	Memory	1x DDR4 up to 8GB	1x onboard DDR5 8GB (default) & 1x DDR5 up to 8GB
	Storage	128GB SSD (M.2)	128GB SSD (M.2)
Display	Size and Resolution	POS615N2: 15.1" 1024 x 768 POS617N2: 15.6" 1920 x 1080	POS615N2: 15.1" 1024 x 768 POS617N2: 15.6" 1920 x 1080
	Touch Screen	True-Flat PCAP multi-touch	True-Flat PCAP multi-touch
Expansion	M.2 (M Key)	1	1
I/O Ports	USB Type-A	2x USB3.0 4x USB2.0	4x USB3.0 2x USB2.0
	USB Type-C FeDP	1x USB3.0 full-functioned (DP/ PD 5V/3A, 12V/3A) 2x Flytech proprietary miniDP (1x for main display, 1x for 2nd display)	1x USB3.0 full-functioned (DP/ PD 5V/3A, 12V/3A) 2x Flytech proprietary miniDP (1x for main display, 1x for 2nd display)
	Serial Port	3x RJ48 (standard RS232) (default 0V; 5V, 12V)	3x RJ48 (standard RS232) (default 0V; 5V, 12V)
	LAN	1x RJ45	1x RJ45
	Cash Drawer	1x RJ11	1x RJ11
	DC Jack	1x 4PIN (with latch)	1x 4PIN (with latch)
Optional I/O Port	Powered USB	2x Powered USB 12V 1x Powered USB 24V	2x Powered USB 12V 1x Powered USB 24V
Audio	Internal Speaker	1x 3W (Option)	1x 3W (Option)
Indicator	Power Button	1	1
Power	Power Adapter	65W/19V (120W/19V with 2x PUSB 12V & 1x PUSB 24V)	120W/19V
Communication	WLAN + BT	802.11 series + BT5.0 (Option)	802.11 series + BT5.0 (Option)
Peripheral (option)	MSR	3-Track MSR (USB)	3-Track MSR (USB)
	Fingerprint	Fingerprint Reader (USB)	Fingerprint Reader (USB)
	NFC	NFC Reader (USB)	NFC Reader (USB)
	iButton	iButton (USB)	iButton (USB)
	Scanner	2D Scanner (USB)	2D Scanner (USB)
	Customer Display 2nd Display	LCM Display 2 x 20 characters (USB) 11.6" 2nd Display	LCM Display 2 x 20 characters (USB) 11.6" 2nd Display
Certificate	EMC & Safety	FCC Class A, CE Mark, LVD	FCC Class A, CE Mark, LVD
Environment	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 85% RH non-condensing	20% ~ 85% RH non-condensing
Dimensions	W x H x D	369 x 380 x 200 mm (14.5" x 15" x 7.9")	369 x 380 x 200 mm (14.5" x 15" x 7.9")
Weight	Weight	5 kg	5 kg
OS Supported		Windows 10 IoT Enterprise, Linux, Android 13.0	Windows 10 IoT Enterprise, Linux, Android 13.0

※ PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE ※

Taiwan - Headquarters

 No.168, Sing-ai Rd., Neihu District,
Taipei City 11494, Taiwan, R.O.C.
 886-2-8791-4988
 886-2-8791-4966
 sales@flytech.com
www.flytech.com

U.S.A. - California

 271 East Brokaw Road, San Jose,
CA 95112, U.S.A.
 1-510-257-5180
 1-510-257-5181
 sales.americas@flytech.com

China - Shanghai

 3F Building 39, No. 333 Qin Jiang Rd.,
Shanghai 200233, P.R.China
 86-21-5426-1555
 86-21-5426-1001
 sales@flytech.com.cn
www.flytech.com.cn

China - Hong Kong SAR

 Rm01, 6/F, Blk A, Tonic Industrial Centre,
26 Kai Cheung Road, Kowloon Bay,
Kowloon, Hong Kong.
 852-3525-5800
 852-2751-7447
 sales@flytech.com.hk

