

**FLYTECH**

# POS665N2 POS667N2

Ultra-Slim POS Solution


Windows Linux Android 13



## KEY FEATURES:

- Integrated with Intel® Alder Lake-N and Meteor Lake processors
- Support Windows, Linux, and Android operating systems
- Two options of 15.1" and 15.6" main displays for selection
- Effortlessly access the motherboard box for easy service and expansion
- Versatile selection of peripherals for better functionality

## DIMENSIONS

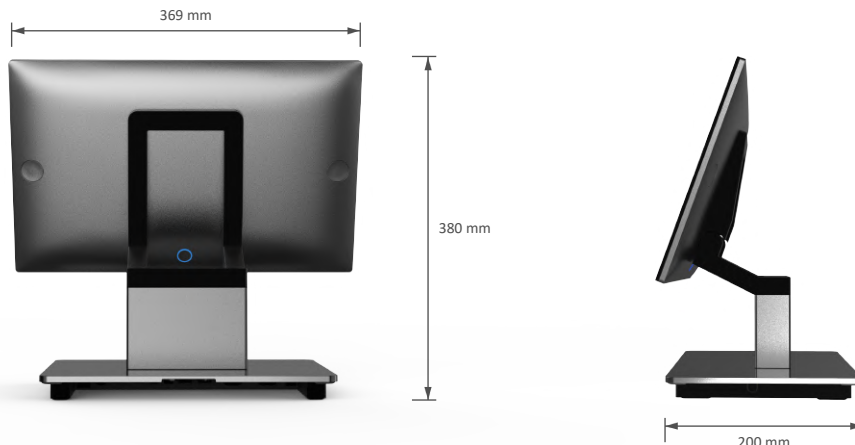

## SPECIFICATIONS

		<b>G35</b>	<b>G75U</b>
<b>System</b>	<b>Motherboard</b>	<b>G35</b>	<b>G75U</b>
	Processor	Intel® Alder Lake N: N97, i3-N305	Intel® Meteor Lake Core Ultra 5 125U
	Memory	1x DDR4 up to 8GB	1x onboard DDR5 8GB (default) & 1x DDR5 up to 8GB
	Storage	128GB SSD (M.2)	128GB SSD (M.2)
<b>Display</b>	<b>Size and Resolution</b>	POS665N2: 15.1" 1024 x 768 POS667N2: 15.6" 1920 x 1080	POS665N2: 15.1" 1024 x 768 POS667N2: 15.6" 1920 x 1080
	<b>Touch Screen</b>	True-Flat PCAP multi-touch	True-Flat PCAP multi-touch
<b>Expansion</b>	M.2 (E Key)	1	1
<b>I/O Ports</b>	USB Type-A	2x USB3.0 4x USB2.0	4x USB3.0 2x USB2.0
	USB Type-C FeDP	1x USB3.0 full-functioned (DP/ PD 5V/3A, 12V/3A) 2x Flytech proprietary miniDP (1x for main display, 1x for 2nd display)	1x USB3.0 full-functioned (DP/ PD 5V/3A, 12V/3A) 2x Flytech proprietary miniDP (1x for main display, 1x for 2nd display)
	Serial Port	3x RJ48 (standard RS232) (default 0V; 5V, 12V)	3x RJ48 (standard RS232) (default 0V; 5V, 12V)
	LAN	1x RJ45	1x RJ45
	Cash Drawer	1x RJ11	1x RJ11
	DC Jack	1x 4PIN (with latch)	1x 4PIN (with latch)
	<b>Optional I/O Port</b>	Powered USB	2x Powered USB 12V 1x Powered USB 24V
<b>Audio</b>	Internal Speaker	1x 3W (Option)	1x 3W (Option)
<b>Indicator</b>	Power Button	1	1
<b>Power</b>	Power Adapter	65W/19V (120W/19V with 2x PUSB 12V & 1x PUSB 24V)	120W/19V
<b>Communication</b>	WLAN + BT	802.11 series + BT5.0 (Option)	802.11 series + BT5.0 (Option)
<b>Peripheral (option)</b>	MSR	3-Track MSR (USB)	3-Track MSR (USB)
	Fingerprint	Fingerprint Reader (USB)	Fingerprint Reader (USB)
	NFC	NFC Reader (USB)	NFC Reader (USB)
	iButton	iButton (USB)	iButton (USB)
	Scanner	2D Scanner (USB)	2D Scanner (USB)
	Customer Display 2nd Display	LCM Display 2 x 20 characters (USB) 11.6" 2nd Display	LCM Display 2 x 20 characters (USB) 11.6" 2nd Display
<b>Certificate</b>	EMC & Safety	FCC Class A, CE Mark, LVD	FCC Class A, CE Mark, LVD
<b>Environment</b>	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 85% RH non-condensing	20% ~ 85% RH non-condensing
<b>Dimensions</b>	W x H x D	369 x 380 x 200 mm (14.5" x 15" x 7.9")	369 x 380 x 200 mm (14.5" x 15" x 7.9")
<b>Weight</b>	Weight	5 kg	5 kg
<b>OS Supported</b>		Windows 10 IoT Enterprise, Linux, Android 13.0	Windows 10 IoT Enterprise, Linux, Android 13.0

※ PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE ※

### Taiwan - Headquarters

No.168, Sing-ai Rd., Neihu District,  
 Taipei City 11494, Taiwan, R.O.C.  
 886-2-8791-4988  
 886-2-8791-4966  
 sales@flytech.com  
[www.flytech.com](http://www.flytech.com)

### U.S.A. - California

271 East Brokaw Road, San Jose,  
 CA 95112, U.S.A.  
 1-510-257-5180  
 1-510-257-5181  
 sales.americas@flytech.com

### China - Shanghai

3F Building 39, No. 333 Qin Jiang Rd.,  
 Shanghai 200233, P.R.China  
 86-21-5426-1555  
 86-21-5426-1001  
 sales@flytech.com.cn  
[www.flytech.com.cn](http://www.flytech.com.cn)

### China - Hong Kong SAR

Rm01, 6/F, Blk A, Tonic Industrial Centre,  
 26 Kai Cheung Road, Kowloon Bay,  
 Kowloon, Hong Kong.  
 852-3525-5800  
 852-2751-7447  
 sales@flytech.com.hk

