


FLYTECH

K879

21.5" Self-Ordering Kiosk

Windows Linux Android




Key Features:

- Versatile processor platform options: MediaTek G700, Intel® Alder Lake-N, and Meteor Lake
- Supports Windows, Linux, and Android operating systems
- Enhanced 21.5" touchscreen for clearer visuals and intuitive operation
- Optional NFC touchscreen for SoftPOS payments on GMS-certified Android MediaTek platform
- Wide selection of peripherals and accessories to support self-ordering setups
- Easy access to motherboard and internal components for streamlined service and maintenance

Dimensions

K879

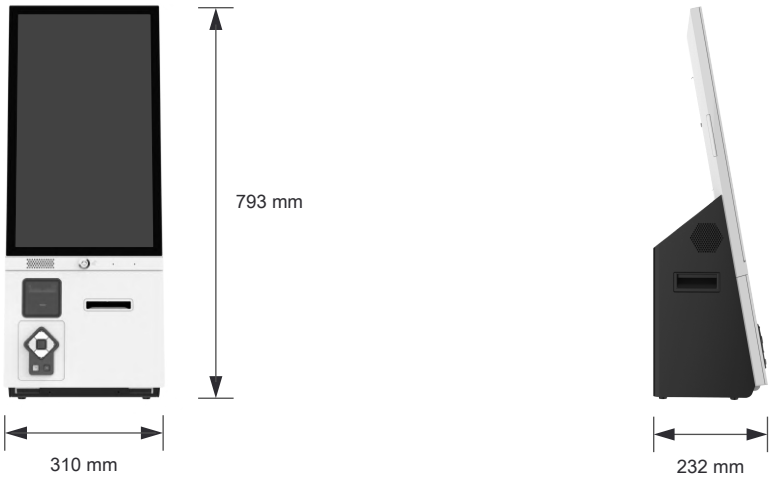

Specifications

	Motherboard	G17	G35	G75U
System	Processor	MediaTek G700 (MT8390)	Intel® Alder Lake N: N97, i3-N305	Intel® Meteor Lake Core Ultra 5 125U
	Memory	8GB LPDDR4	8GB DDR4	8GB DDR5
	Storage	128GB eMMC	128GB SSD (M.2)	128GB SSD (M.2)
Expansion	Storage	1 x MicroSD card slot	-	-
Display	Size and Resolution	21.5" 1920 x 1080	21.5" 1920 x 1080	21.5" 1920 x 1080
	Touch Screen	True-Flat PCAP multi-touch	True-Flat PCAP multi-touch	True-Flat PCAP multi-touch
I/O Ports	USB Type-A	4 x USB2.0	2 x USB3.0, 4 x USB2.0	4 x USB3.0, 2 x USB2.0
	USB Type-C	1 x USB3.0 Full Function (DP/PD 5V/2A, 12V/1A)	1 x USB3.0 Full Function (DP/PD 5V/3A, 12V/3A)	1 x USB3.0 Full Function (DP/PD 5V/3A, 12V/3A)
	FeDP	1 x Flytech proprietary miniDP	2 x Flytech proprietary miniDP	2 x Flytech proprietary miniDP
	Serial Port	1 x RJ48 (standard RS232)	3 x RJ48 (standard RS232)	3 x RJ48 (standard RS232)
	LAN	1 x RJ45	1 x RJ45	1 x RJ45
	Cash Drawer	1 x RJ11	1 x RJ11	1 x RJ11
	DC Jack	1 x 2-pin	1 x 4-pin (with latch)	1 x 4-pin (with latch)
Audio	Speaker	1 x 3W	1 x 3W	1 x 3W
Power	Power Supply	65W/12V	65W/19V	120W/19V
Communication	WLAN+BT	WiFi 6 + BT5.2 (default)	WiFi 6 + BT5.2 (Option)	WiFi 6 + BT5.2 (Option)
Payment Capability (option)	NFC (SoftPOS Capable)	NXP IC7220 controller with integrated 80 x 80 mm antenna (*SoftPOS supported on GMS-certified Android POS only)	-	-
Peripheral (option)	RFID	Support HID OMNIKEY 5127CK Mini	Support HID OMNIKEY 5127CK Mini	Support HID OMNIKEY 5127CK Mini
	MSR	3-Track MSR (USB)	3-Track MSR (USB)	3-Track MSR (USB)
	Camera	5MP Camera	5MP Camera	5MP Camera
	LED Status Indicator	Light Bar Module	Light Bar Module	Light Bar Module
	Camera + LED Status Indicator	5MP Camera + Light Bar Module Combo Kit	5MP Camera + Light Bar Module Combo Kit	5MP Camera + Light Bar Module Combo Kit
	Scanner	Support Honeywell HF680M	Support Honeywell HF680M	Support Honeywell HF680M
	Printer	Support Epson TM-M30II / m30III / T88VII, HPRT TP808 (bracket only)	Support Epson TM-M30II / m30III / T88VII, HPRT TP808 (bracket only)	Support Epson TM-M30II / m30III / T88VII, HPRT TP808 (bracket only)
	Payment Device	Support Ingenico Lane/3600, Verifone P400 (payment bracket only)	Support Ingenico Lane/3600, Verifone P400 (payment bracket only)	Support Ingenico Lane/3600, Verifone P400 (payment bracket only)
Mounting	Mounting Kit	Counter mount, Wall mount, Floor stand	Counter mount, Wall mount, Floor stand	Counter mount, Wall mount, Floor stand
Certificate	Certificate	FCC Class A, CE Mark Class A, LVD	FCC Class A, CE Mark Class A, LVD	FCC Class A, CE Mark Class A, LVD
Environment	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)	0°C ~ 35°C (32°F ~ 95°F)	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 85% RH non-condensing	20% ~ 85% RH non-condensing	20% ~ 85% RH non-condensing
Dimensions	W x H x D	310 x 793 x 232 mm (12.2" x 31.2" x 9.1")	310 x 793 x 232 mm (12.2" x 31.2" x 9.1")	310 x 793 x 232 mm (12.2" x 31.2" x 9.1")
OS Supported		Android 13.0 (GMS)	Windows 10/11 IoT Enterprise, Linux, Android 13.0	Windows 10/11 IoT Enterprise, Linux, Android 13.0

※ PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE ※

Taiwan - Headquarters

No.168, Sing-ai Rd., NeiHu District,
Taipei City 11494, Taiwan, R.O.C.
886-2-8791-4988
886-2-8791-4966
sales@flytech.com
www.flytech.com

U.S.A. - California

271 East Brokaw Road, San Jose,
CA 95112, U.S.A.
1-510-257-5180
1-510-257-5181
sales.america@flytech.com

China - Shanghai

3F Building 39, No. 333 Qin Jiang Rd.,
Shanghai 200233, P.R.China
86-21-5426-1555
86-21-5426-1001
sales@flytech.com.cn
www.flytech.com.cn

China - Hong Kong SAR

Rm01, 6/F, Blk A, Tonic Industrial Centre,
26 Kai Cheung Road, Kowloon Bay,
Kowloon, Hong Kong.
852-3525-5800
852-2751-7447
sales@flytech.com.hk

